



9531421 | Set of 2 taps MULTIAPPLICATION HSS VAPORISED HSS hand taps | BSP GAS thread | DIN 5157 | 6H PREMIUM (Unit packaging)

Application: Through/blind hole in steels up to 1000N/mm², stainless steels and cast irons.




■ Especially for multiple applications

- High-speed steel
- STEAM treatment

Machine



Application

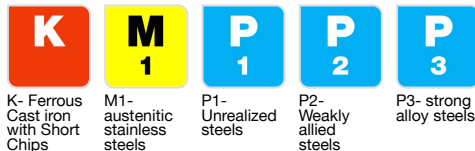

Features



Properties and benefits

- + High speed steel: grade of steel especially designed for cutting tools. ➡ Enables the simple and precise tapping of hard materials, stainless steels, steels, and cast irons.
- + STEAM treatment : Steam oxidation treatment. ➡ Avoids cold bonding. Reduced coefficient of friction in steels.



Code	EAN	Thread	Ø	Pitch	Norm	Drill	L	I	I4	I5	QTY	PCB
953142100120140	3221912267665	BSPG	1/2	14	DIN 5157	19,00	80	22		12,00	2	1
953142100140190	3221912267672	BSPG	1/4	19	DIN 5157	11,80	70	20		9,00	2	1
953142100180280	3221912267689	BSPG	1/8	28	DIN 5157	8,80	63	18		5,50	2	1
953142100340140	3221912267719	BSPG	3/4	14	DIN 5157	24,50	90	22		16,00	2	1
953142100380190	3221912267696	BSPG	3/8	19	DIN 5157	15,25	70	20		9,00	2	1
953142100580140	3221912267702	BSPG	5/8	14	DIN 5157	21,00	80	22		14,50	2	1
953142100780140	3221912267726	BSPG	7/8	14	DIN 5157	28,25	90	22		18,00	2	1
953142110000110	3221912267733	BSPG	1"	11	DIN 5157	30,75	100	25		20,00	2	1
953142110120110	3221912267757	BSPG	1"1/2	11	DIN 5157	45,50	140	32		29,00	2	1
953142110140110	3221912267764	BSPG	1"1/4	11	DIN 5157	39,50	125	32		24,00	2	1
953142110180110	3221912267788	BSPG	1"1/8	11	DIN 5157	35,50	125	32		22,00	2	1
953142110380110	3221912267795	BSPG	1"3/8	11	DIN 5157	42,00	125	32		29,00	2	1
953142120000110	3221912267801	BSPG	2"	11	DIN 5157	57,20	160	36		35,00	2	1