


Multi-application threading. Precision comfort




- Especially for steels and aluminiums
- Comfort and precision
- High-speed steel

Machine

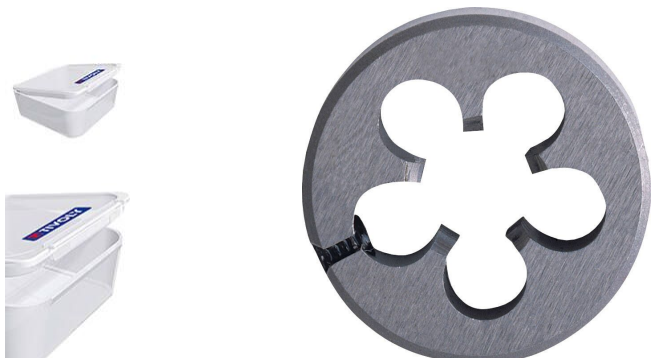

Application



N- Non-ferrous alloys

P1- Unrealized steels

P2-4- Weakly alloyed decolourage steels

Features



Properties and benefits

- + High-speed steel: HSS substrate ➡ For general use in steels and cast irons up to 950 N/mm²



Item number M3	EAN (13 digits) M3	Tap or thread diameter	Pitch in mm or TPI	Cage diameter	Cage height	Quantity No. pieces per sales unit	PCB By How Much M3
1100061240300	3221910709679	M24	3	63.5	20	1	1
1100061270300	3221910709709	M27	3	63.5	20	1	1
1100061300350	3221910709747	M30	3,5	63.5	20	1	1
1100061330350	3221910709754	M33	3,5	63.5	20	1	1
1100061360400	3221910709761	M36	4	63.5	20	1	1
1100061270150	3221910709686	MF27	1,5	63.5	20	1	1
1100061270200	3221910709693	MF27	2	63.5	20	1	1
1100061280150	3221910709716	MF28	1,5	63.5	20	1	1
1100061300150	3221910709723	MF30	1,5	63.5	20	1	1
1100061300200	3221910709730	MF30	2	63.5	20	1	1