

11454170002 | 26 pieces - 25 FURIUS FUSIO coated HSS metal drill bits, split point, Ø 2 to 13 mm + 1 countersinker Ø 15mm PREMIUM

High-performance drill bit for incredibly fast and intensive drilling of high-strength steels and cast irons, thanks to its geometry and its FUSIO coating. Made in France.

- Especially for high-strength steels and cast irons
- Incredibly fast drilling
- Maximum long life
- Comfort and precision
- Made in France

- Automatic centring
- Anti-shock
- 35° type N flute
- High-speed steel
- 135° tip


25 drill bits Ø 2 to 9 mm by 1/2 Ø 10 to 13 mm by 1 Ø 3 - 3.2 - 4 - 4.2 - 5 - 6.8 mm + 1 countersinking bit Ø 15 mm - RANGER Case



Machine



Application

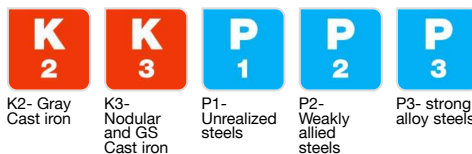

Features



Properties and benefits

- + Split-point grinding:reduction of the drill tip. ➡ Enables the simple self-centring of the drill bit on the smoothest of surfaces. Significantly reduces the required axial load.
- + Anti-shock: 4 corners made from anti-shock elastomer, and a glass panel for a perfect view of the contents. ➡ Transport this case to your sites, and carry it up a step ladder or ladder in complete safety: the case can withstand any potential drops.
- + 35° type N flute: normal flute profile with a 35° helix angle. ➡ Suitable for strong and difficult materials. Enables finer edge sharpness, for reduced cutting effort.
- + High-speed steel: HSS substrate ➡ For general use in steels and cast irons up to 950 N/mm²
- + 135° tip: 135° tip angle for the sharpening of the drill bit. ➡ Suitable for strong and difficult materials. Enables a shorter and stronger cutting edge, thus prolonging the service life.
- + FUSIO coating: Ti2CN base, thickness 2/4µm, hardness 3200HV, coefficient of friction 0.2, heat resist. 400°C. ➡ Thermal shield. Allows you to significantly increase service life, cutting speed, and progress. Reduces the axial load. Especially for steels.

Données de gestion :

PCB : 1 / Kilogram. : 0,930 / Dimensions : 0198x0124x0044 mm / EAN : 3221912058096